
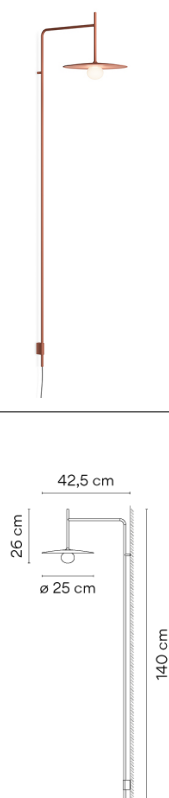


Model Sheet

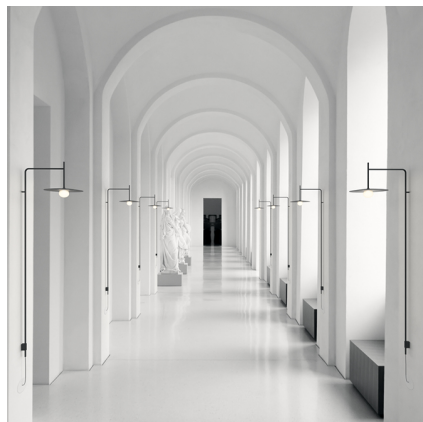

Finish	18 Graphite ADAPTA RF 9913 WX
	58 Cream RAL 7044
	62 Green NCS S 3010-G20Y
	37 Terra Red NCS S 4040-Y70R

LED temperature color 2700 K

Dimming 1-10V PUSH

Installation type Built-in Canopy

Materials Body: Steel
Diffuser: Blown-glass
LED support: Aluminum

Light source 1 x LED 4W 350mA
E

LED CRI>90 440.81 lm 110
2700 K

Driver CC - Constant Current 350
220~240 V 50/60 HZ

Remarks Built-in version

☐ ☒ Dimmable ☒ LED
☐ IP20 ☒ 50-60Hz


Application Wall Lamps

Packaging 2 Box
0.384 m x 1.455 m x 0.072 m
Gross weight 3.7
Net weight 1.3
Vol. 0.0558

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

Other Applications

