

TECHNICAL CHARACTERISTICS

TMOK2ETD

Moka







Stool

The comfort of the Moka chair is transformed into a stool. Presented in two heights, 65 and 75, with its elegant and fine steel structure and its seat fully upholstered. Providing warmth, making a minimal and simple space, more welcoming.

DESIGNED BY ONDARRETA TEAM



ondarreta

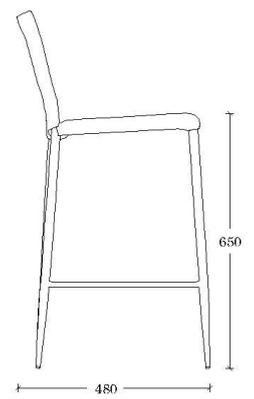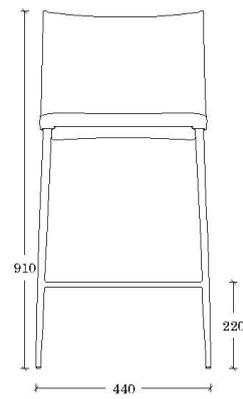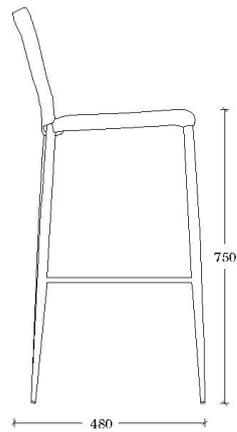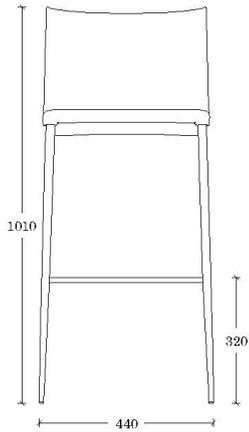

DIMENSIONS

H65: 44 cm x 48 cm x 91 cm x 65 cm x 22 cm (17.3" x 18.9" x 35.8" x 25.6" x 8.7") [width x depth x height x seat height x footrest height]

H75: 44 cm x 48 cm x 101 cm x 75 cm x 32 cm (17.3" x 18.9" x 39.8" x 29.6" x 12.6") [width x depth x height x seat height x footrest height]

WEIGHT

H65: 5,4 kg (11,9 lb)

H75: 5,7 kg (12 lb)

PACKAGING

H65 one chair per box, box dimensions: 62,3 cm x 48 cm x 95,5 cm (24.5" x 19" x 37.6")

H75 one chair per box, box dimensions: 60,3 cm x 46 cm x 106 cm (23.7" x 18.1" x 41.7")

CERTIFICATION

Product tested under the European standard EN 15373, category of general use L2.

ACCESSORIES

Stainless steel footrest

ORIGIN

100% Made in Europe

DESIGN

Ondarreta Team



COMPONENTS

FRAME

Material

16 mm (0.6") diameter and 2 mm (0.08") thickness cold laminated St-37 quality steel tube.

Tensile Strength: 340-470 N/mm² (49,300-68,160 psi);
Elastic Limit > 235 N/mm² (32,080 psi); Elongation > 25%,
Surface Hardness > 110 HB.

Finish

Colour Epoxy

SEAT

Fabrics

Plywood sheet covered with 15 mm (0.6") thick polyether elastic foam.

Technical Characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

BACK

Fabrics

Resistant foam stuffing on the steel structure.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

Technical Characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence).

COM REQUIREMENTS

Necessary fabric for upholstery: 90 cm (35,4") width/unit.

